


Fuji Xerox

DocuCentre-V C2263/2265

COPY · FAX · PRINT · SCAN · SCAN TO FILE/EMAIL ·
EMAIL · NETWORKING

NEW

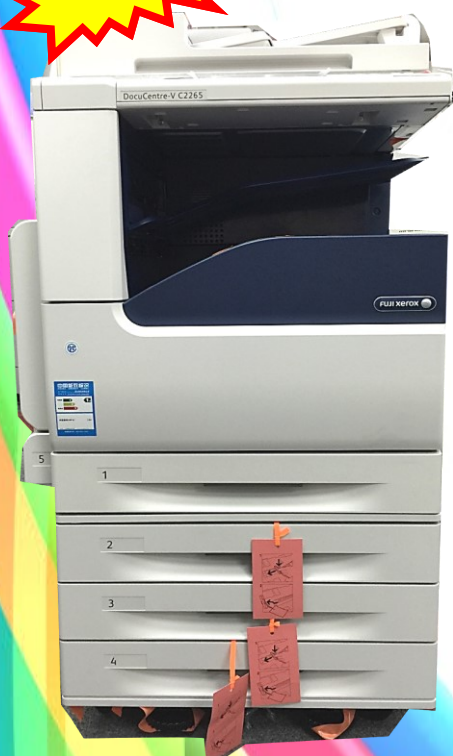

Type	Console Type
Memory	4GB (Max.)
HDD	160 GB
Scanning Resolution	600 x 600 dpi
Printing Resolution	2400dpi
Warm-Up Time	30 sec or less (at room temperature 23°C)
Original Paper Size	Max. 297 x 432 mm (A3, 11 x 17") for both sheet original and book original
Output Paper Size	Max: A3, 297 x 432 mm, For Bypass Tray: Max. 320 x 482.6 mm Min: A5, For Bypass Tray: Postcard (100 x 148 mm), Envelope (120 x 235 mm)
Output Paper Weight ²	Tray: 60 – 256 gsm, Bypass Tray: 60–216 gsm
First Copy Output Time	BW: 5.9 sec Colour: 12.0 sec
Continuous Copy Speed (DCV C2263/2265)	A4: 20 ppm <BW/Colour> DCV C2263 A4: 25 ppm <BW/Colour> DCV C2265 A3: 11 ppm <BW/Colour> DCV C2263/2265
Paper Tray Capacity	DCV C2263 : 500 sheets x 2 Trays DCV-C2265 : 500 sheets x 4 Trays Max : 1,096/2,045 sheets (DV C2263/2265) Bypass 96 sheets
Output Tray Capacity	Exit 1: 250 sheets (A4LEF), Exit 2: 250 sheets (A4LEF)
Power Consumption	Running: 578 W, Stand-by: 78 W Sleep Mode: 1.0 W
Dimensions	(W)616 x (D)659 x (H)1119mm
Machine Weight	95 kg (excludes toner)
Options	Postscript (MAC)

1 CPS configuration

2 Performance may vary for heavyweight, coated and special stocks.



**WE SELL / RENT / LEASE
FUJI XEROX COPIERS & PRINTERS/PLOTTERS**

For more information, please contact:

PTC Business Systems Pte Ltd

625 Aljunied Road #07-01 to #07-09
Aljunied Industrial Complex
Singapore 389836

Tel: **67415993** | Fax: 67449566

Email : sales@ptc-copier.com.sg